


Threshold Seals

Sealmaster®

SEALMASTER THUNDER


For acoustic seals on internal doors and refurbishing inward opening external doors

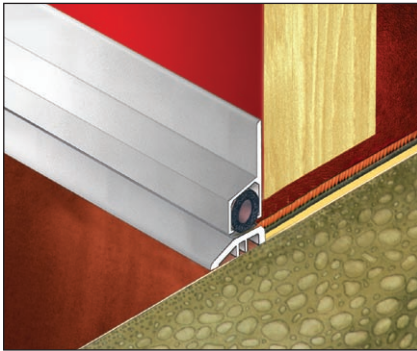

TNS/WHS



TMS/WHS

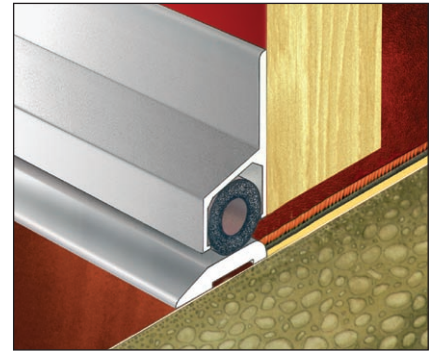

TLS/WGS

APPLICATIONS

A combination seal to improve the performance of inward opening doors with a water bar in the sill but can also be used as a very effective acoustic door seal. It forms the basis of acoustic seals installed by the BBC in its recording studio and auditoria doors.

For acoustic sealing applications the Thunder weather bar sections may be reversed so that only a flat aluminium kick plate is visible and doors can be more easily wedged open. For such applications the low rise 3mm threshold plate (section TM) is suitable.


HOW TO SPECIFY

e.g. Sealmaster Thunder TLS/WGS to suit door inmm wide opening.

Threshold to be bedded in silicone and fixed to floor with screws/plugs. Weatherboard (reversed if required) to be fixed to door with screws (rebate door if reversed).

FEATURES & BENEFITS

Thunder seals are available in two sizes with the same overall shape. Where an external door is to be sealed a larger section combination is recommended e.g. TLS/WGS. The smaller section combinations e.g. TNG/WHG are more suited to internal applications.

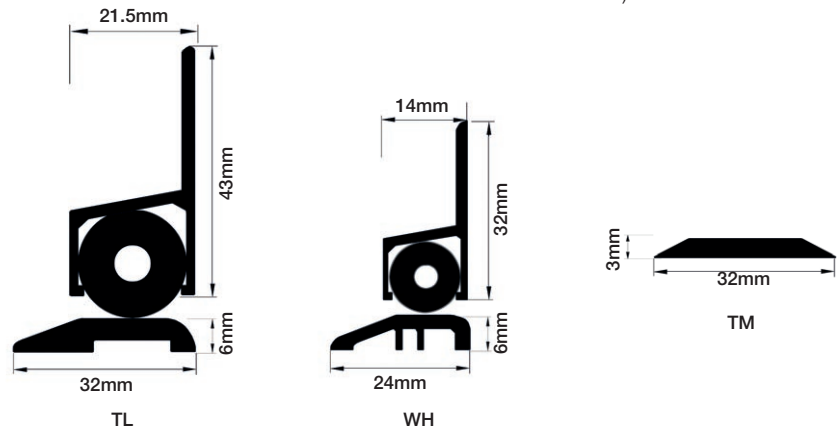

Standard Options	Satin Silver WGS	Satin Gold WGG	Satin Silver WHS	Satin Gold WHG
Satin Silver - TLS	 TLS/WGS			
Satin Gold - TLG		TLG/WGG		
Satin Silver - TMS		TMS/WGS	TMS/WHS	
Satin Gold - TMG		TMG/WGG		TMG/WHG
Satin Silver - TNS			TNS/WHS	
Satin Gold - TNG				TNG/WHG